

# DTH HAMMER 6"

## PROROCK PR65



The Prorock PR65 DTH hammer is the fastest hammer in its class. It is designed for less air consumption and high performance.

Suitable for drilling at a wide range of air pressures and diameters.


Top-adaptor with retract carbides for digging out of drilled bores.

Air pressures of 7 to 30 bar (100-435 psi)

Drilling diameters of 152 - 245mm (6 - 9-5/8").

Shanks available: QL6, DHD360, SD6, QL6.

**Air Consumption**

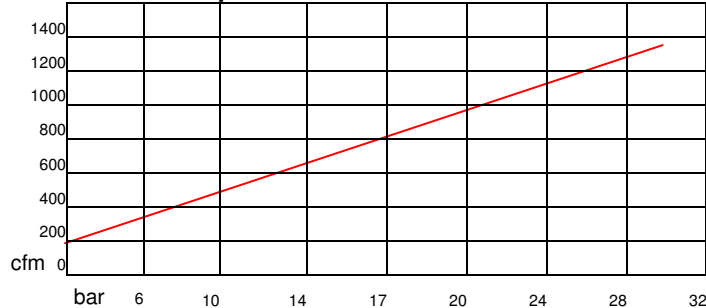

### Technical details

P.N.	Weight	Outside dia	Top thread	Length	Drilling dia	W. pressure	Air consup.	Shank
	Kgs	mm	Pin					mm
09003-1382	106	142	Api 3-1/2 reg	1200	160-205	6-26	13-30	QL6
09003-1380	107	142	Api 3-1/2 reg	1257	160-205	6-26	13-30	SD6
09003-1383	106	142	Api 3-1/2 reg	1257	160-205	6-26	13-30	DHD360

### Parts list

Pos.	Qty.	Description	Part number
1	1	Top adaptor	09004-0430
2	1	O-ring	09004-0440
3	1	Valve joint	09004-0450
4	1	Valve	09004-0460
5	1	Spring	09004-0470
6	1	Washer	09004-0480
7	1	Washer	09004-0490
9	1	Air distributor	09004-0500
10	1	Internal cylinder	09004-0510
11	1	Piston SD6	09004-0520
11	1	Piston QL6	09004-0521
11	1	Piston DHD360	09004-0522
12	1	External cylinder	09004-0530
13	1	Guide bush	09004-0540
14	1	O-ring	09004-0550
15	1	O-ring	09004-0560
16	1	Retaining ring	09004-0570
17	1	Chuck SD6	09004-0580
17	1	Chuck QL6	09004-0581
17	1	Chuck DHD380	09004-0585

