


# DTH HAMMER 5"

## PROROCK PR55



The Prorock PR55 DTH is a heavy duty hammer. Top speed hammer class, specially designed for geothermal and water well drilling.  
 Low air consumption and high drilling speed makes PR55 leader class in performance.  
 Suitable for drilling at a wide range of air pressures and diameters.  
 Top-adaptor with retract carbides (optional) for digging out of drilled bores.  
 Air pressures of 7 to 25 bar (100-350 psi)  
 Drilling diameters of 135 - 155mm (5-1/2"-6").  
 Shanks available: DHD340, QL5.

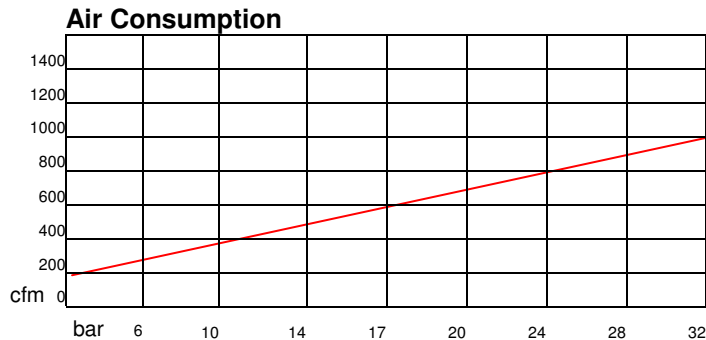

### Technical details

P.N.	Weight Kgs	Outside dia mm	Top thread Pin	Length mm	Drilling dia mm	W. pressure bar	Air consup. m3/min	Shank type
09003-1370	78	124	Api 3-1/2 reg	1215	135-155	6-25	13-30	DHD350
09003-1400	77	124	Api 3-1/2 reg	1190	135-155	6-25	13-30	QL5

### Parts list

Pos.	Qty.	Description	Part number
2	1	Shank DHD350	09004-0290
2	1	Sank QL5	09004-0291
3	1	Retaining ring	09004-0300
4	1	O-ring	09004-0310
5	1	External cylinder	09004-0320
6	1	Piston	09004-0330
7	1	Internal cylinder	09004-0340
8	1	Air distributor	09004-0350
9	1	Buffer	09004-0360
10	1	O-ring	09004-0370
11	1	Spring	09004-0380
12	1	Valve	09004-0390
13	1	O-ring	09004-0400
14	1	O-ring	09004-0410
15	1	Top adaptor	09004-0420

