


# DTH HAMMER 8"

## PROROCK PR85




The Prorock PR85 DTH is a heavy duty hammer. Top speed hammer class, specially designed for water well and micro pilling drilling. Suitable for drilling at a wide range of air pressures and diameters. Top-adaptor with retract carbides (optional) for digging out of drilled bores. Air pressures of 7 to 30 bar (100-435 psi) Drilling diameters of 195 - 254mm (7-1/2" - 10"). Shanks available: SD8, DHD380, QL8

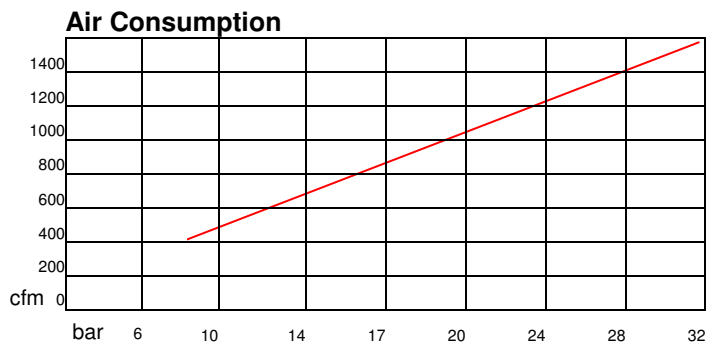

### Parts list

Pos.	Qty.	Description	Part number
1	1	Top adaptor	09004-0590
2	1	O-ring	09004-0600
3	1	Valve joint	09004-0610
4	1	Valve	09004-0620
5	1	Spring	09004-0630
6	1	Washer	09004-0640
7	1	Washer	09004-0650
9	1	Air distributor	09004-0660
10	1	Internal cylinder	09004-0670
11	1	Piston SD8	09004-0680
11	1	Piston QL8	09004-0682
11	1	Piston DHD380	09004-0681
12	1	External cylinder	09004-0690
15	1	O-ring	09004-0700
16	1	Retaining ring	09004-0710
17	1	Chuck SD8	09004-0720
17	1	Chuck QL8	09004-0721
17	1	Chuck DHD380	09004-0722

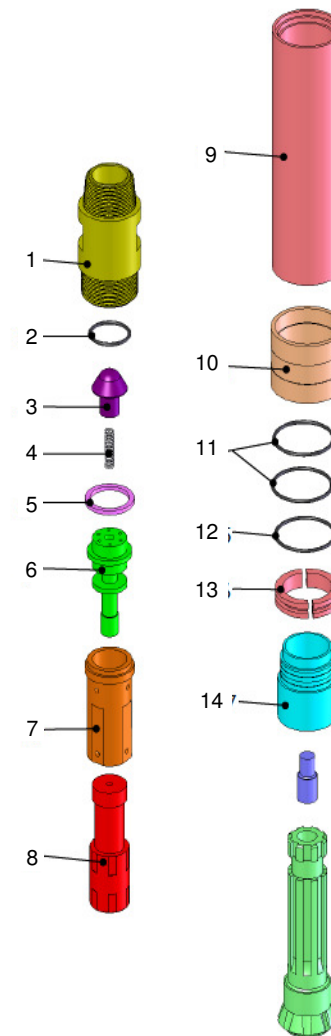

### Technical details

P.N.	Weight	Outside dia	Top thread	Length	Drilling dia	W. pressure	Air consup.	Shank
	Kgs	mm	Pin	mm	mm	bar	m3/min	type
09003-1391	190	180	Api 4-1/2 reg	1492	195-254	6-30	25-45	DHD380
09003-1390	190	180	Api 4-1/2 reg	1492	195-254	6-30	25-45	SD8
09003-1392	190	180	Api 4-1/2 reg	1492	195-254	6-30	25-45	QL8

