

DTH HAMMER 4"

PROROCK PR45



The Prorock PR45 DTH is a heavy duty hammer. Can drill in all conditions and is designed for all purpose drilling.


Suitable for drilling at a wide range of air pressures and diameters.

Top-adaptor with retract carbides (optional) for digging out of drilled bores.

Air pressures of 7 to 26 bar (100-350 psi)

Drilling diameters of 105 - 135mm (4 - 5-1/2").

Shanks available: DHD340.

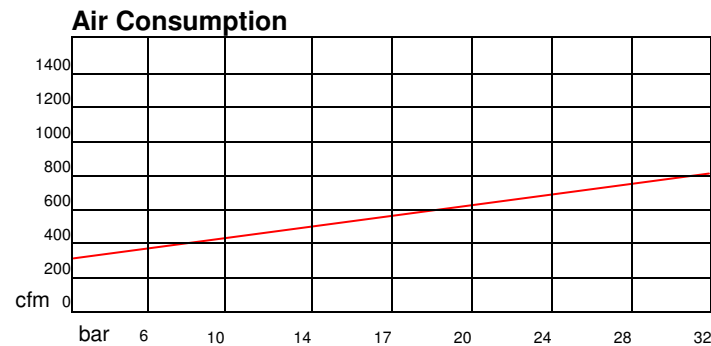

Technical details

P.N.	Weight	Outside dia	Top thread	Length	Drilling dia	W. pressure	Air consup.	Shank
	Kgs	mm	Pin	mm	mm	bar	m3/min	type
09003-1360	36	97	Api 2-3/8 reg	1033	105-135	6-25	5-15	DHD340

Parts list

Pos.	Qty.	Description	Part number
2	1	Shank	09004-0150
3	1	Retaining ring	09004-0160
4	1	O-ring	09004-0170
5	1	External cylinder	09004-0180
6	1	Piston	09004-0190
7	1	Internal cylinder	09004-0200
8	1	Air distributor	09004-0210
8	1	Guide bush	09004-0220
9	1	Spring	09004-0230
10	1	Valve	09004-0240
11	1	Valve joint	09004-0250
12	1	O-ring	09004-0260
13	1	Top adaptor	09004-0270

